

## 1480/1550nm Polarization Maintaining WDM Filter

FIBERWDM can supply 1480/1550nm Polarization Maintaining WDM Filter (PM filter), the PM filter multiplexes PM signals and maintains the output polarization with high extinction ratio using advanced micro-optic filter technology. All input and output fibers are polarization maintaining. This product can support Low power (300 mW, 500 mW) and high power ( up to 20W).

It can also be provided with a PM isolator integrated in the same package. They are great used in polarization maintaining fiber amplifiers, fiber lasers, and high speed communication system and instrumentation applications.

### Features


- ◆ Low insertion loss
- ◆ High Extinction Ratio
- ◆ High channel isolation
- ◆ High stability and reliability

### Specifications

Parameter		Unit	T1550/R1480	T1480/R1550
Transmission Wavelength Range		nm	1535~1580	1470~1490
Reflect Wavelength Range		nm	1470~1490	1535~1580
Max. Insertion Loss@23°C	Transmission	dB	0.6	
	Reflect	dB	0.4	
Min. Isolation@23°C	Transmission	dB	25	
	Reflect	dB	12	
Min. Extinction Ratio		dB	20	
Min. Channel Flatness		dB	0.3	
Min. Return Loss		dB	50	
Max. Power Handling(CW)		W	0.3, 0.7, 1, 2,3	
Max. Tensile Load(N)		N	≤5	
Fiber Type		-	PM1550 Panda fiber	
Operating Temperature		°C	-5 to +70	
Storage Temperature		°C	-40 to +85	
Package Dimensions		mm	Ø5.5 x L35	

1. Above specifications are for device without connector, and the PM WDM device is both axis working. All parameters are tested at room temperature.
2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. Power transmits through the connector less than 2W.The default connector key is aligned to slow axis.
3. For >10W high power applications, we will use heat sink package, contact FIBERWDM for details.
4. If there is pulse application, please be sure to inform us of pulse energy and peak power.
5. If need other request, please contact FIBERWDM.

**Package Information**

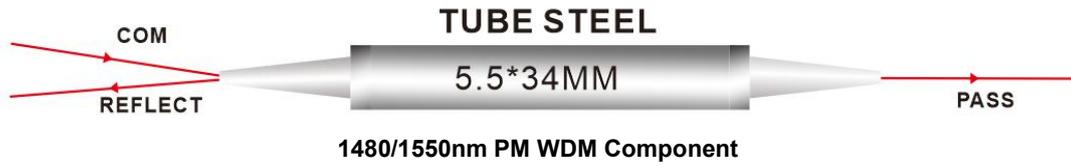

**Order Information**

PMW-	-Channel-	-Package	Connector-	Pigtails Diameter	Fiber Length	Working Axis
	54:1550nm pass/1480nm reflect	S: steel tube	01U/A: LC/UPC or LC/APC	25:250µm bare fiber	05:0.5m	B: Both axis working
	45:1480nm pass/1550nm reflect	X: others	02U/A: SC/UPC or SC/APC	90:900µm Loose Tube	10:1.0m	F: Fast axis blocked
			03U/A: FC/UPC or FC/APC	XX: Others	15:1.5m	
			04U/A: others		XX: Others	

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail.

Part Number Example: PMW-54-S-01A-90-10-B

Description: Polarization Maintaining WDM, TX 1550/RX1480nm, LC/APC all ports, 0.9mm 1.0m fiber, Steel tube, Both axis working.

If you need to customize other specifications, please provide detailed description for your requirement, and contact us by email: [sales@fiberwdm.com](mailto:sales@fiberwdm.com)