

CWDM for 4G/5G fronthaul System

Products Description:

In 4G/5G fronthaul system, if use optical fiber direct to connect RRU and DDU, it is simple, but it takes up a lot of optical fiber resources, and many times, the optical fiber resources are scare. In this case, if use CWDM system, can save your fiber resources. CCWDM (Compact Coarse Wavelength Division Multiplexer) technology is used and adjacent channels are cascaded in free space using parallel beams instead of optical fibers.

FIBERWDM are mainly producing WDM products, our 6ch /12ch CWDM are used in 3G,4G and 5G fronthaul system.

Key features:

- ✓ 6ch /12ch CWDM over one (01) SMF
- ✓ Small size, light weight
- ✓ No power required
- ✓ 19" Rackmount/Wall mount/Pole mount
- ✓ Low insertion Loss
- ✓ Easy installation and Maintenance
- ✓ IP 55 standard for Outdoor Box; IP 25 standard for Indoor Box
- ✓ Stable working
- ✓ High temperature Operation
- ✓ 3G+4G+5G Application used. Suitable with vendors: Huawei, Nokia, Ericsson, ZTE,...
- ✓ LC/UPC Connector or Customer required

Typical Product



1:12 CCWDM ABS Box


(COD12-LGX01-2757: For outdoor box)



1:12 CCWDM LGX Box

(CCOM12-LGX01-2757: For Indoor box)

Application solution as below:

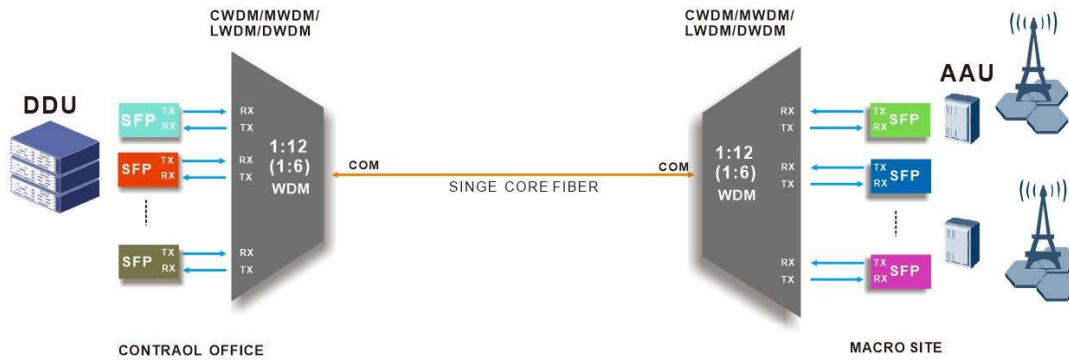

I. 12 waves remote passive WDM Mux&DeMux

Optical performance indicators

parameter	unit	index
Number of channels		12
Center wavelength	nm	1271、1291、1311、1331、1351、1371、1471、1491、1511、1531、1551、1571
Center wavelength deviation	nm	±1.5
-1dB channel bandwidth	nm	>14
Center wavelength Passband (nm)		±6.5
Channel spacing (nm)		20
Channel Passband Ripple	dB	≤0.5
Mux&DeMux Channel insertion loss	dB	≤1.8
Mux&DeMux Channel insertion loss uniformity	dB	<1.0
Polarization Dependant Loss (PDL)	dB	≤0.2
Polarization Dispersion Mode (PDM)	ps	≤0.2
Adjacent channel isolation	dB	≥30
Non-adjacent channel isolation	dB	≥45
Wavelength Heat stability	nm/°C	<0.002
Insertion loss heat stability	dB/°C	<0.007
Polarization-related losses	dB	<0.2
Directivity	dB	>50
Return loss	dB	>45
Maximum Power Handling	mW	500
Connectors		LC/UPC or required
Working temperature	°C	-5 ~ +70
Storage temperature	°C	-40 ~ +85
Working humidity		5% ~ 95% RH , no condensation

parameter	unit	index
Protection Class - Water, Dust resistant		≥IP55 (outdoor unit); ≥IP 25 (indoor unit)
Standard		ITU-T G.694.2, CE, RoHS
ABS BOX Dimensions	mm	130*100*25mm
LGX BOX Dimensions	mm	214*150*20mm
1U 19" rack Dimensions	mm	440*160*44mm

II. Colourful module

1. 10G/10km CWDM colourful module

The 10Gb/s SFP+ CWDM colourful module based on the wireless fronthaul passive wavelength division multiplexing system conforms to the MSA protocol, has the characteristics of low power consumption, small size, multi-rate, etc., is compatible with CPRI 7/8, 10GE, STM-64 and other network applications, with a maximum transmission distance of up to 10 kilometers, RoHS compliant, and supports digital diagnostic functions.

Optical performance indicators

Product model	Tx wavelength (nm)	Rx wavelength (nm)	Distance (km)	Tx optical power range (dBm)	Overload Optical Power (dBm)	Ext (dB)	Receiver Sensitivity (dBm)
10G-CWDM10-27E	1271	1260~1620	10km	0~+5	≥0.5	≥3.5	≤-13
10G-CWDM10-29E	1291						
10G-CWDM10-31E	1311						
10G-CWDM10-33E	1331						
10G-CWDM10-35E	1351						
10G-CWDM10-37E	1371						
10G-CWDM10-47E	1471						
10G-CWDM10-49E	1491						
10G-CWDM10-51E	1511						
10G-CWDM10-53E	1531						
10G-CWDM10-55E	1551						
10G-CWDM10-57E	1571						

III. Indoor&Outdoor passive WDM

1. Indoor 1U rack - LGX Box

The indoor 1U rack is a 4-slot, 1U-high passive rack, material is steel and powder coated which is suitable for inserting 4 indoor combiner LGX box, which can realize the compact installation of the indoor combiner and save space in the equipment room. The 1U rack can be installed in a 19-inch cabinet.



Figure 1.1 Typical View of a indoor 1U rack



Indoor 1U rack size

2. Remote outdoor boxes

The outdoor dust-proof box is a special box for outdoor wall-mounted or pole-mounted remote WDM system, material is ABS, which supports 1 or 2 built-in remote combination splitters, meets the requirements of IP55 standards, has a lightweight structure and is easy to install.

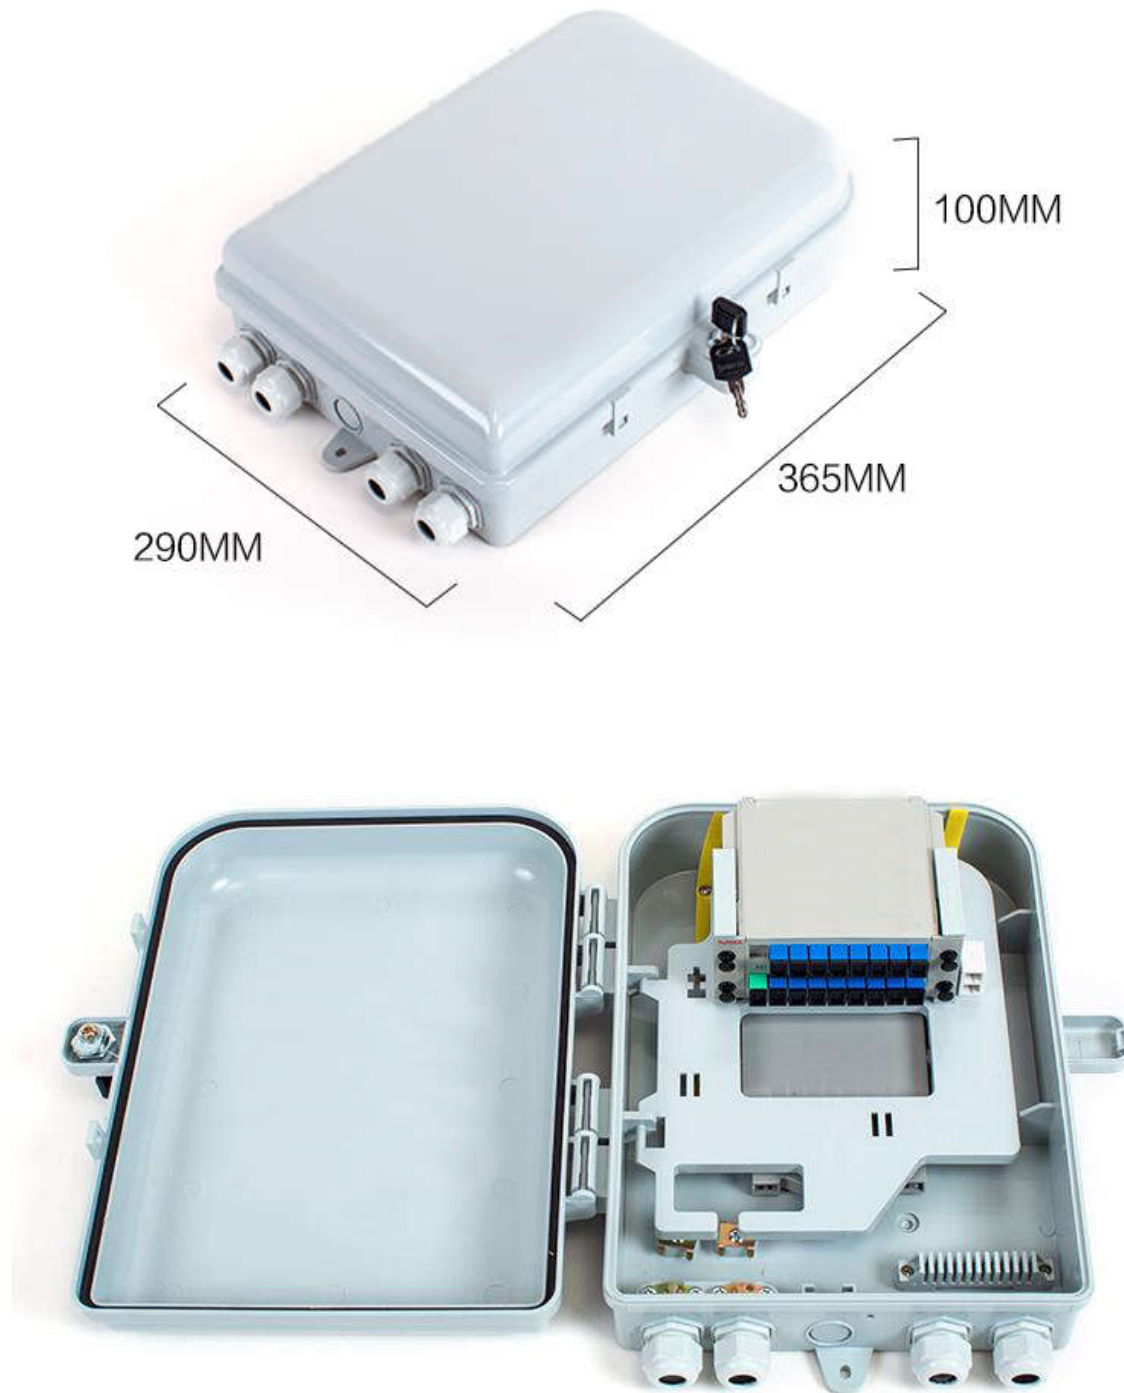


Figure 1.3 Typical View of the remote outdoor dust box